

# MBR20200LFCT

Schottky Barrier Diodes Low Forward Voltage  
20 A Total (10A Per Diode Leg)

TO

## FEATURES

- Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- Metal silicon junction ,majority carrier conduction
- Guard ring for overvoltage protection
- Low power loss ,high efficiency
- High current capability ,Low forward voltage drop
- High surge capability
- For use in low voltage ,high frequency inverters, free wheeling ,and polarity protection applications
- Dual rectifier construction
- High temperature soldering guaranteed:260° C/10 seconds.,, 0.25"(6.35mm)from case
- Component in accordance to RoHS 2011/65/ EU

## MECHANICAL DATA

- Case: JEDEC ITO-220AB molded plastic body
- Terminals: Lead solderable per MIL-STD-750,method 2026
- Polarity: As marked
- Mounting Position: Any
- Weight: 1.81 gram
- \* Lead Free Finish/RoHS Compliant


## VOLTAGE RANGE

200 Volts

## CURRENT

20.0Ampere


## ITO-220AB

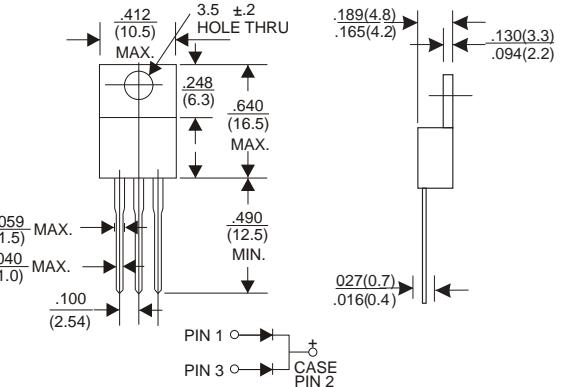


Dimensions in inches and (millimeters)

## RATINGS (Per Diode Leg)


Rating	Symbol	MBR20200LFCT	Unit
Peak Repetitive Reverse Voltage	V <sub>RRM</sub>	200	V
Average Rectified Forward Current (Rated V <sub>R</sub> ) T <sub>C</sub> = 133°C	I <sub>F(AV)</sub>	10	A
Peak Repetitive Forward Current (Rated V <sub>R</sub> , Square Wave, 20 kHz) T <sub>C</sub> = 133°C	I <sub>FRM</sub>	20	A
Typical Instantaneous Forward Voltage (I <sub>F</sub> = 10Amps, T <sub>C</sub> = 25°C)	V <sub>F</sub>	0.85	V
Nonrepetitive Peak Surge Current (Surge applied at rated load conditions halfwave, single phase, 60Hz)	I <sub>FSM</sub>	200	A
Peak Repetitive Reverse Surge Current (2.0 µs, 1.0 kHz)	I <sub>RRM</sub>	5	A
Operating Junction Temperature	T <sub>J</sub>	- 65 to +175	°C
Voltage Rate of Change (Rated V <sub>R</sub> )	dv/dt	10,000	V/µs
Maximum Instantaneous Reverse Current (Rated dc Voltage, T <sub>C</sub> = 125°C) (Rated dc Voltage, T <sub>C</sub> = 25°C)	I <sub>R</sub>	6.0 0.05	mA

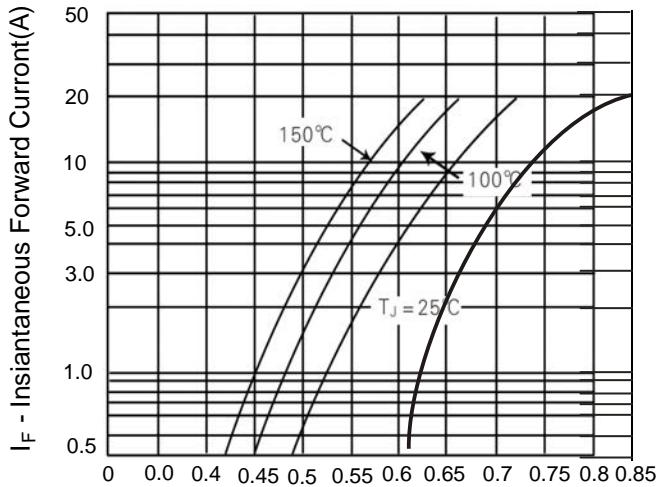


**Figure 1. Typical Forward Voltage Per Diode**

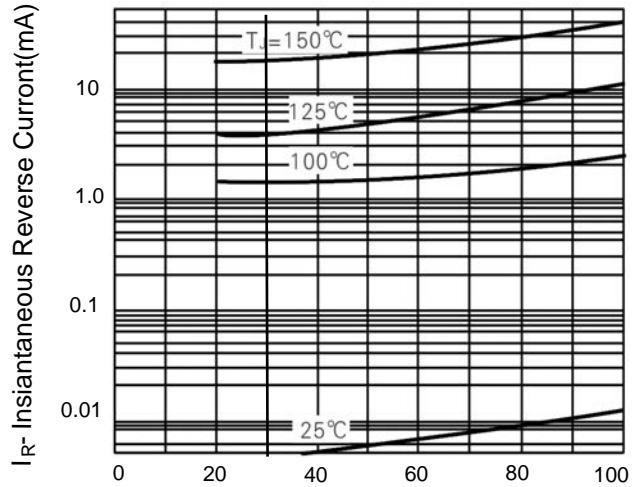

**Figure 2. Typical Reverse Current Per Diode**

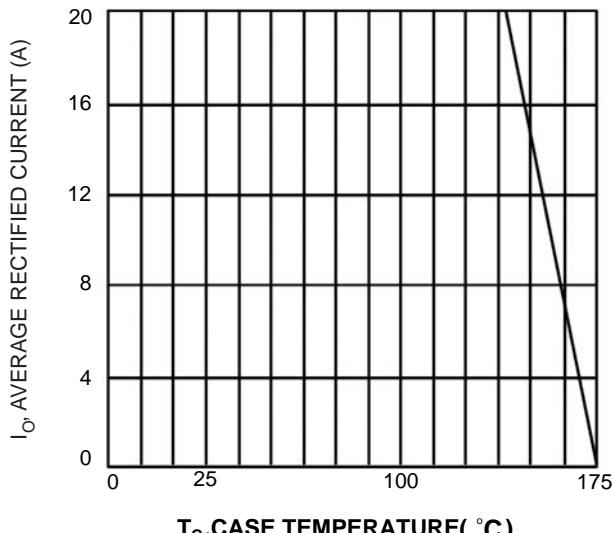

**Fig.3 Forward Current Derating Curve**

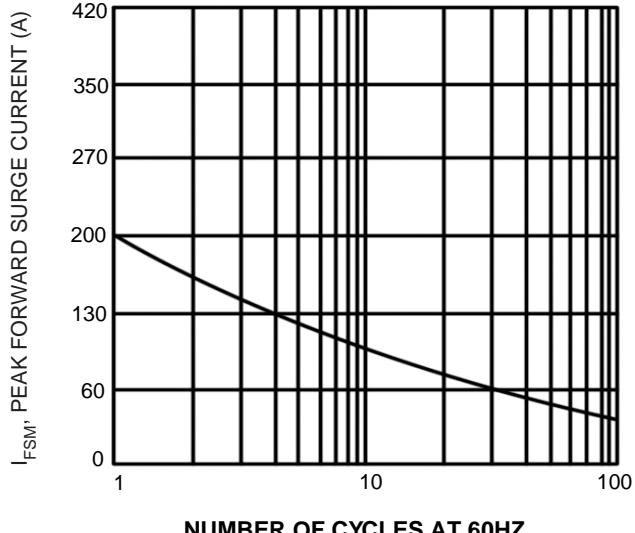

**Fig.4 Max Non-Repetitive Surge Current**